



File Access Manager Forensics

Version: 8.4

Revised: March 27, 2023

Copyright and Trademark Notices

Copyright © 2023 SailPoint Technologies, Inc. All Rights Reserved.

All logos, text, content, including underlying HTML code, designs, and graphics used and/or depicted on these written materials or in this Internet website are protected under United States and international copyright and trademark laws and treaties, and may not be used or reproduced without the prior express written permission of SailPoint Technologies, Inc.

"SailPoint," "SailPoint & Design," "SailPoint Technologies & Design," "Identity Cube," "Identity IQ," "IdentityAI," "IdentityNow," "SailPoint Predictive Identity" and "SecurityIQ" are registered trademarks of SailPoint Technologies, Inc. None of the foregoing marks may be used without the prior express written permission of SailPoint Technologies, Inc. All other trademarks shown herein are owned by the respective companies or persons indicated.

SailPoint Technologies, Inc. makes no warranty of any kind with regard to this manual or the information included therein, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. SailPoint Technologies shall not be liable for errors contained herein or direct, indirect, special, incidental or consequential damages in connection with the furnishing, performance, or use of this material.

Patents Notice. <https://www.sailpoint.com/patents>

Restricted Rights Legend. All rights are reserved. No part of this document may be published, distributed, reproduced, publicly displayed, used to create derivative works, or translated to another language, without the prior written consent of SailPoint Technologies. The information contained in this document is subject to change without notice.

Use, duplication or disclosure by the U.S. Government is subject to restrictions as set forth in subparagraph (c) (1) (ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 for DOD agencies, and subparagraphs (c)(1) and (c)(2) of the Commercial Computer Software Restricted Rights clause at FAR 52.227-19 for other agencies.

Regulatory/Export Compliance. The export and re-export of this software is controlled for export purposes by the U.S. Government. By accepting this software and/or documentation, licensee agrees to comply with all U.S. and foreign export laws and regulations as they relate to software and related documentation. Licensee will not export or re-export outside the United States software or documentation, whether directly or indirectly, to any Prohibited Party and will not cause, approve or otherwise intentionally facilitate others in so doing. A Prohibited Party includes: a party in a U.S. embargoed country or country the United States has named as a supporter of international terrorism; a party involved in proliferation; a party identified by the U.S. Government as a Denied Party; a party named on the U.S. Department of Commerce's Entity List in Supplement No. 4 to 15 C.F.R. § 744; a party prohibited from participation in export or re-export transactions by a U.S. Government General Order; a party listed by the U.S. Government's Office of Foreign Assets Control as ineligible to participate in transactions subject to U.S. jurisdiction; or any party that licensee knows or has reason to know has violated or plans to violate U.S. or foreign export laws or regulations. Licensee shall ensure that each of its software users complies with U.S. and foreign export laws and regulations as they relate to software and related documentation.

Contents

- Forensics Introduction** **1**
- Forensics Types** **2**
 - Using Permission Forensics 2
 - Identity Forensics 8
 - Tabs 9
 - Activity Forensics 9
 - Data Classification Forensics 12
 - Reports 13
- Filters: Creating and Editing a Forensics Query** **17**
- Generating Reports** **20**

Forensics Introduction

The forensics screens allow the administrators to view File Access Manager service data analyses. The tables can be filtered to fit specific needs, and filters can be saved and shared with others as well.

The File Access Manager website has the following forensics screens:

- Activity forensics
- Permissions forensics
- Identities forensics
- Data Classification forensics

Forensic queries can be used to answer questions such as:

- Who has accessed files classified as credit cards?
- Who can access folders classified as SSN?
- Are there users without a password in the system, or users who haven't logged in for the past six months?

Forensics Types

There are four Forensic types:

- Permissions
- Identities
- Activity
- Data Classification

Using Permission Forensics

The Permission Forensics screen lets the administrator monitor and analyze the user and group permissions. On this screen you can create queries to analyze the permissions of specific groups of users, save and share queries for selecting users and groups, generate reports, run permission scans, and revoke explicit permissions of users.

This page supports reports and campaigns.

This component answers questions, such as:

- Which users have access to what resources?
- Which users have not used permissions granted to them?
- Which permissions were granted to each group?
- Which groups are not being used?

The table displays the permissions according to the level of granularity selected in the filter.

When creating a filter, you can define the granularity of the report using the **View by** field, and can mark stale permissions on the table according to the unused time selected.

Note: The query retrieves the first 100,000 results. Narrow the search to obtain a better fit.

Reports

See [Generating Reports](#)

Filters

See [Filters: Creating and Editing a Forensics Query](#)

Viewing Permission Forensics

The Permission Forensics table displays the permissions retrieved by the query run.

By default, the data displayed includes the following columns for each permission:

- Resource
 - Business resource full path
 - Application
- User
 - User name
 - User display name
 - Group name
 - User domain
 - Group domain
 - User entity type
 - Group entity type
- Permission
 - Permission type
 - Classification category
 - Is inherited
 - Inherits permissions
 - ACL type allowed?

To change the order of the columns, drag the column titles.

Additional columns available are:

Application group, Application type, Business Resource Logical Path, Business Resource Name, Business Resource Type, Creates Loop, Creation Timestamp, Cumulative Last Used, Department, Distinguished Name,

Group Path, Is Effective, Is Owner Permission, Is Riskiest, Is, SID History, Last Login Date, Last Used Date, Loop Path, Password Never Expires, Password Not Required, Permission Type Description, User Disabled, User Email, User Locked

To select columns to display:

1. Select the **column chooser** icon on the table header bar.
2. Select the columns to display from the dropdown list.
 - Click **Show All / Show Less** to display a full list of columns / only the default columns in the column chooser. This does not change the selection of columns to display in the table.
 - Use the search field to narrow down the list of columns in the column chooser.
 - Click **Reset Columns** to reset to the default selection and order of the columns in the table.

View by

The default view is the Users and Groups view.

You can change the granularity of the output by selecting the **View By** type. These options determine whether to check a user's direct permissions or permissions granted by groups the user belongs to, as described below:

- Groups & Users direct Permissions – this view displays direct Users' and Groups' permissions but does not display the Group members.
- Users direct & Group membership Permissions – this view displays user permissions based on direct permission, group membership, and nested group membership. This view doesn't list the users in the groups Everyone and Authenticated Users.
- Everyone Groups expanded, Users direct & Group membership Permissions – this view displays user permissions based on direct permission, group membership, and nested group membership, including listing the members of the Everyone and Authenticated Users groups.

Note: In the permission forensic screen, the View By field can be changed after setting or restoring the filter.

Mark Stale Permissions

Select the time period for stale permissions. The user permissions that were not used for a given time (time period is configurable) are marked in red.

Scope and Hierarchical Search

By default, when you select a business resource (BR) to scope its permissions, only the direct BR permissions (not the child BR permissions) display.

Special Groups - Group Entity Type

When creating a filter, you can select the group entity type from the **Field** field.

In Windows-based environments, the user groups are Everyone, Authenticated Users, and Domain Users.

Everyone

Includes all users.

Authenticated Users

Includes all users without a guest.

Domain Users

Includes a group with all users in the domain. By default, any user created is a member of this group, though it is possible to remove that user.

Owner Permission Field

File Access Manager permissions forensics allows identification and tracking of Owner permissions in the File Access Manager interface:

- A proprietary column, called “Is Owner Permission” indicates whether a given permission is an Owner permission.
- A proprietary query attribute is dedicated for filtering Owner permissions allowing queries and/or reports listing the owners of resources.


Permission Scan for Business Resource

The Permission Scan collects the security information from the scanned BRs, and stores it in the File Access Manager database. This includes which users or groups have access to the BR, and whether the access is inherited. The permission scan stores access types such as read, write, full control, etc., depending on the application type.

When requesting a permission scan, you can set the resources to scan, and the number of levels below the requested BR to scan.

To perform a permission scan:

1. Open the Permission Forensics screen
Forensics > Permissions
2. From the Global Options dropdown menu, select **Start Permission Scan**.
3. This will open the Permission Scan panel. Select the scan level:
 - This Business Resource only
 - This Business Resource and levels 'Level 1-4' and 'All Levels'
4. Click **Scan** to start the scan, or **Cancel** to return to the Permission Forensics screen.

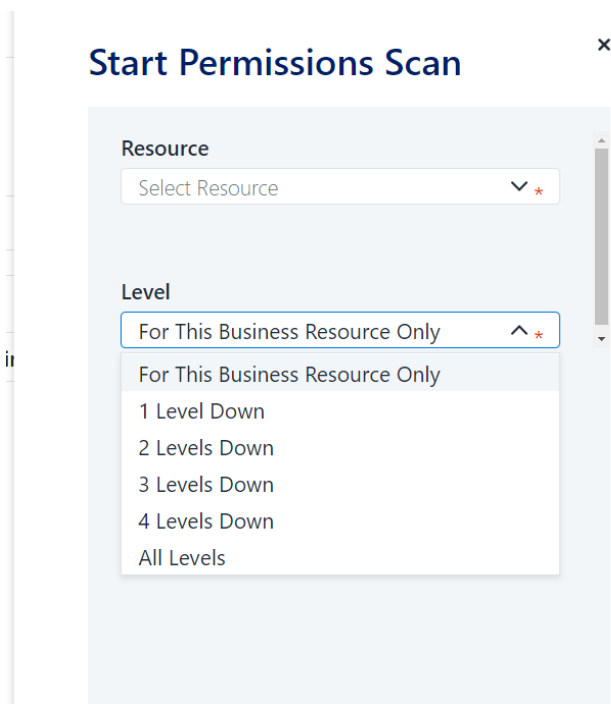

DFS Support

For DFS resources, the Permission Forensics table will show the physical, as well as the logical path of resources. You can create a filter for DFS resources by logical path only. To select a logical path, select **Resource** on the **Select Field** drop down menu, then navigate to the required path on the resource tree on the **Select Resource** dropdown menu. (See [Searching for Resources Using a Resource Tree](#)).

Removing Explicit Permissions Using the Permission Forensics Page

This process will revoke explicit permissions from non-normalized resources that are configured for access fulfillment. Permissions that are inherited will not be removed.

1. Navigate to **Forensics > Permissions**.
2. Set a filter, as described in [Filters: Creating and Editing a Forensics Query](#).
3. Click **Apply** to run the filter.
4. Set the View to **Groups and Users direct permissions**.
5. In the permission results, select the permission rows to remove by clicking the checkbox on the row.

Before selecting which permissions to remove, be sure that:

- The Application in which the BR resides is configured to support Access Fulfillment for Direct Permission Removal. [Configuration](#) has additional information on how to configure removal of explicit permissions.
 - The permission is defined directly on the BR. Verify the value in the **Is Inherited** column is False.
 - The selected permission is not a normalized group, created and managed by File Access Manager.
6. Click **Revoke Explicit Permissions**.

Permissions Forensics ⓘ Saved Queries Global Options ⌵

✓ Filters (3) ⌵ Save | Clear All Apply +

Last Login Date	Last X Days	30		
Application	Any of	11 Value(s)		
Password Never Expires	Equals	True		

3 rows selected Revoke Explicit Permissions

<input type="checkbox"/>		Application	User Name	User Display Name	Group Name	User Domain
<input type="checkbox"/>	Administrator.OFFICE	HDS-QP	Administrator	Administrator@!		OFFICE
<input checked="" type="checkbox"/>	in\S-1-5-21-3335839157-159428...	HDS-QP	Administrator	Administrator@!		OFFICE
<input type="checkbox"/>	Administrator.OFFICE\AppData	HDS-QP	Administrator	Administrator@!		OFFICE
<input checked="" type="checkbox"/>	Administrator.OFFICE\Contacts	HDS-QP	Administrator	Administrator@!		OFFICE
<input checked="" type="checkbox"/>	Administrator.OFFICE\Desktop	HDS-QP	Administrator	Administrator@!		OFFICE

Identity Forensics

Navigate to **Forensics > Identities**.

The Identities Forensics screen displays users, groups, and their relationship recorded by the system. Use filters to focus on specific data, The page supports reports and campaigns.

The displayed output is limited to the first 100,000 results.

Identities Forensics 🔍 Saved Queries Global Options

Users Membership in Groups | Users | Groups

Filters (2) | Save | Clear All | Apply

Last Login Date	Older than X Days	100	🔍	🗑️
User Domain	Contains	OFFICE	🔍	🗑️

User Name	User Display Name	User Domain	Group Name	Group Domain	Group Path
MG-Test-3	MG-Test-3	OFFICE	NestedGroup_Dave	OFFICE	NestedGroup_Dave...
testdelete1	testdelete	OFFICE	Users	siq-mtz-yoavt2	Users@siq-mtz-yo...
MG-Test-3	MG-Test-3	OFFICE	TST-GRP-4-LOCAL-...	na7mode_vf	TST-GRP-4-LOCAL-...
u0g102		OFFICE	isa-test-97-users	OFFICE	isa-test-97-users@...
Roy		OFFICE	Administrators	OFFICE	Administrators@O...
Roy		OFFICE	SIQ-v40server2new...	OFFICE	SIQ-v40server2new...
testingnew	testing user new	OFFICE	Flat Group with Do...	OFFICE	Flat Group with Do...
mg_tst	Michael Guber	OFFICE	Users	siq-mtz-yoavt2	Users@siq-mtz-yo...
u0g1000		OFFICE	adielgroup	na7mode_vf	adielgroup@na7m...
SYL1	SYL1	OFFICE	shlomitUsers	OFFICE	shlomitUsers@OFF...

Rows per page: 10 | 1831 - 1840 of 3798 | Page 184 of 380

Tabs

Note: Each tab has a separate filter and stored query list.

Select the tab to display different data about users, groups and their relationship.

Users' Membership in Groups

View of users and their group memberships;

Users

This tab displays users and their attributes, defined in the identity store.

Groups

This tab displays groups and their attributes, defined in the identity store.

Identity queries involve identity stores connected to File Access Manager, regardless of the permissions attached to these identities.

Activity Forensics

To locate the Activity Forensics page, navigate to **Forensics > Activity**.

The Activity Forensics page can be used to track user activities in various areas of interest. For example:

Forensics Types

Activity Forensics 🔍

✓ Filters (1) Actions ▾

Field: Equals Add

Applied Filters :
Application Any of "local windows file s ..." ✎ ✕

Clear Apply

Time Frame: Show alerts only Columns ▾

Date/Time	Action Type	User Name	Resource	Object Name	Categories	Actions
3/22/2020 9:12:09 AM	Read File	Local System	\\siq-josh2012\CS\ProgramDa...	edr-2020-03-22_07-12-09-ca...		☰
3/22/2020 9:12:09 AM	Write File	Local System	\\siq-josh2012\CS\ProgramDa...	edr-2020-03-22_07-12-09-ca...		☰
3/22/2020 9:12:09 AM	Create File	Local System	\\siq-josh2012\CS\ProgramDa...	edr-2020-03-22_07-12-09-ca...		☰
3/22/2020 9:12:09 AM	Create File	Local System	\\siq-josh2012\CS\ProgramDa...	edr-2020-03-22_07-12-09-ch...		☰
3/22/2020 9:12:09 AM	Write File	Local System	\\siq-josh2012\CS\ProgramDa...	edr-2020-03-22_07-12-09-pr...		☰
3/22/2020 9:12:09 AM	Create File	Local System	\\siq-josh2012\CS\ProgramDa...	edr-2020-03-22_07-12-09-ev...		☰
3/22/2020 9:12:09 AM	Read File	Local System	\\siq-josh2012\CS\ProgramDa...	edr-2020-03-22_07-12-09-pr...		☰
3/22/2020 9:12:09 AM	Create File	Local System	\\siq-josh2012\CS\ProgramDa...	edr-2020-03-22_07-12-09-pr...		☰
3/22/2020 9:12:09 AM	Read File	Local System	\\siq-josh2012\CS\ProgramDa...	edr-2020-03-22_07-12-09-ev...		☰
3/22/2020 9:12:09 AM	Write File	Local System	\\siq-josh2012\CS\ProgramDa...	edr-2020-03-22_07-12-09-ch...		☰

Show Per Page Showing 1-10/100000 Results « 1 2 3 4 5 ... 10000 »

Filter

The activity forensics filter allows users to focus on set scenarios and areas of interest.

When you open the activity forensics page, it loads with the last query used.

The query is composed of one or more filters, combined with an **and** operator.

Activity Forensics 🔍

✓ Filters (3) Actions ▾

Field: Equals Add

Applied Filters :
Resource Any of 2 Value(s) ✎ ✕ Application Any of "local windows file s ..." ✎ ✕ Action Type Any of 3 Value(s) ✎ ✕

Clear Apply

Creating a Query

1. Create a filter.
 - a. Select a field from the field dropdown list.
 - b. Select an operator.
 - c. Select or type in a value. For multiple values, start typing part of the value and select items from the dropdown list by ticking the checkbox next to each item.
2. Click **Add** to add this filter to the query list.
3. Repeat to add additional filter items to the query.
4. Click **Apply** to run the query, and display the results.


Common Activity Forensics filter fields

Action type	
Application	From the applications connected and monitored by File Access Manager
Application type	
Category	As assigned by the data classification module
Object name	
Resource	Specific folder or folders to monitor
User	

Storing and Sharing Queries

The 10 last queries are stored for reuse, with the query timestamp as the name.

You can store queries for later use, with a meaningful name, with the option of sharing them with other users.

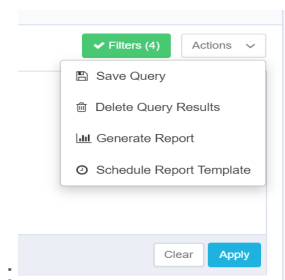


To store or share queries:

1. Click the **Actions** dropdown menu on the top right corner.
2. Click **Save Query** to open the Save Query dialog box.
3. Type in the query name, and optionally, the name of a user(s) to share the query with.
 - a. Start typing the user name. To add a user to the share list, click the **+** button.

Loading Stored Queries

To load a stored query, open the query list panel on the left side of the activity forensics page. You might have to click the restore button **>** , if this panel is minimized.

Click on a recent query or a stored query to load the query and apply it to the results.

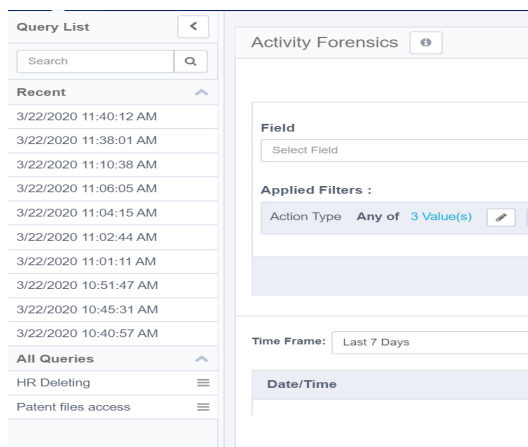

Saving the Query to a Report

To create a report from an Activity Forensics query, select **Generate Report** from the **Activities** dropdown menu.

The report will be available in **Reports > My Reports**.

Creating a Scheduled Report from a Query

You can also create a repeated report from the query by selecting **Schedule Report Template** from the **Activities** dropdown menu to open the Schedule Report Template panel.

Data Classification Forensics

The Data Classification Forensics screen can be found by navigating to **Forensics > Data Classification**. It displays data classification results, based on your active policies. Use filters to focus on specific data. You can sort the results by Match Count. The returned records are limited to 10,000 results.

Note: The Data Classification Results table shows results of the data classification process running in File Access Manager, as well as any data classification results imported from an external source, using the [Import Data Classification Results](#) feature. This might lead to duplicate entries from the two sources.

Resource Full Path	File Name	Policy Name	Rule Name	Categories	Match Count
\\localhost\C\$\Windows\System32\LogFiles\Sum	listofemails.txt	Personally Identifiable Information (PII) Policy	Personal Information Rule - Custom	Social Security Number, Passport Number, Driver License and 3 more	
\\localhost\C\$\Windows\System32\eh-L5	customcreditcard.txt	Custom Credit Card Policy	Credit Card Tracking Rule	Acronyms, CardTypes, CC-Number and 5 more	65
\\localhost\C\$\Windows\ServiceProfiles\LocalService\AppData\Local	nextquotatodraft.txt	Custom Intellectual Property Policy	Intellectual Property Rules	Copyrights, Patents, Trademarks and 6 more	43
\\localhost\C\$\inetpub\wwwroot\Security\QB2\app	importancz.txt	Payment Card Industry (PCI) Policy	Credit Card Tracking Rule	Acronyms, CardTypes, CC-Number and 5 more	34

Reports

Data Classification reports can be found in the report templates, using the Classified Data tag to locate relevant reports.

Using the Data Classification Forensics Table

Change one or more of the default columns by clicking on **Display Columns** and selecting one or more columns from the dropdown menu. Currently, all columns display, including the following:

Application

This column displays all the system applications.

Application Type

This column displays all the system application types.

Last Updated

This is the timestamp of the last classification process, in which the file was classified into the specified category.

Result Type

This is the source of the classification result (Content, Behavioral, or Imported Classification).

Note: The default column headings, from left to right, are: Resource Full Path, File Name, Policy Name, Rule Name, Categories, and Match Count.

You can clear any selections made in the Policy, Rule, and Category search fields by clicking **Clear Selection** on the top right of each field.

1. Select a result type from the Result Type dropdown menu.

All

All possible result types

Behavioral

Only results from behavioral rules

Composite Classification

Results from composite rules (Combining the results of several classifications)

Content

Only results from content rules

Imported

Normally, the administrative client imports the results from a Data Loss Prevention (DLP) product that has already scanned the results to control what data end users can transfer, so there is no need to rescan those results.

2. Type a number in both the Match Count (greater than) and the Match Count (less than) fields to restrict the number of Regular Expression (Regex, the general standard for textual search) results.

Note: Users can see the resources according to the user scope they have.

A result record represents the classification of a certain file by file, rule and policy. A single file can be classified into multiple rules/policies, resulting in a separate record in the result for each file-to-rule-to-policy relation.

The result record consists of default columns, which can be changed, based on the users' requirements:

Resource Full Path

This is the full path of the resource in which the file resides.

File Name

This is the name of the classified file.

Policy Name

This is the name of the policy by which the file is classified.

Rule Name

This is the name of the rule by which the file is classified.

Category

This is the classification category name used by the rule.

Note: If the rule result is part of a policy with an active global rule, the global category will also be displayed along with the rule category, as long as it matches the global rule threshold.

Match Count

This is the maximum number of matches under any rules requirements contained in the file. This is not an aggregative figure, and does not sum up the number of matches in each of the rule requirements for the file. Instead, it represents the highest match count yielded by any of the rule requirements and should be viewed as a sensitivity score attributed to the file, in accordance with the applicable policy rules.

For example, if a policy rule contains two rule requirements – one matching credit card numbers with ten occurrences of credit card numbers within the same file, and another matching telephone numbers with eight occurrences of telephone numbers within the same file, the Match Count value of the file for that category (assigned by the rule) would be 10 (rather than 18, or 8), since it represents the maximum number of occurrences matching any of the rule requirements within that policy rule.

When the result displays a regular expression search, this field is clickable and display the masked matches of the regular expression.

Note: The query retrieves the first 10,000 results. Narrow the search to obtain a better fit.

Filter

Complete the following steps to filter data classification forensics:

1. Select the **Filters** button at the top right of the screen.
2. The filter screen displays.

The screenshot shows the 'Data Classification Forensics' filtering interface. At the top, there is a header 'Data Classification Forensics' with a search icon. Below the header, there are two buttons: 'Filters' and 'Columns'. The main filtering area is divided into several sections:

- Policy Name:** A search box with '0 Selected' and a 'Clear Selection' link. Below it is a search input field with a magnifying glass icon.
- Rule:** A search box with '0 Selected' and a 'Clear Selection' link. Below it is a search input field with a magnifying glass icon.
- Category:** A search box with '0 Selected' and a 'Clear Selection' link. Below it is a search input field with a magnifying glass icon.
- Result Type:** A dropdown menu currently set to 'All'.
- Match Count (Bigger than):** A text input field with the placeholder 'Value Bigger than'.
- Match Count (Smaller than):** A text input field with the placeholder 'Value Smaller than'.
- Filter by scope:** A section containing:
 - Scope Type:** A dropdown menu currently set to 'All'.
 - Value:** A dropdown menu with the placeholder 'Select Value'.

At the bottom right of the filtering area, there is a 'Reset' button.

The forensics results can be filtered by:

- Policy Name
- Category
- Rule Name
- Result Type (All, Content, Behavior, Imported)
- Match Count (greater than/less than)
- Filter by Scope
 - a. Select a scope type (Application type, Application, or Resource) from the Scope Type dropdown menu.
 - b. Select a corresponding resource from the Resources dropdown menu.
You can clear a selection from this dropdown menu by clicking **Clear Selection** on the top right of the menu.
 - c. Click **Reset** at the bottom left of the filtering screen to apply all the selected filters.

Filters: Creating and Editing a Forensics Query

A query is a collection of one or more filters that let you select from a list of parameters to select user types, permissions, user scenarios or permission scenarios to analyze.

When searching for queries using the search bar, the results that are returned will only match words that start with the search term.

Example: When typing "ser", that will match results like "server". It will not display results like "users".

1. Select **Clear All** to clear the current filters, and clear the grid.
2. Select **+** to add a filter to the query.
3. Select a field to filter by from the **Select Field** dropdown menu, and the filter criteria, according to the field type and parameters.
4. Select **Save** to add the filter line to the query, or **Cancel** to start over.
5. Add more filter lines by repeating these steps as required.

For example:

```
"Last login date older than 100 days  
and  
Password not required equals True"
```

6. Click **Apply** to run the query.

The screenshot shows the 'Permissions Forensics' interface. At the top, there are buttons for 'Saved Queries', 'Global Options', 'Filters (2)', 'Save', 'Clear All', and 'Apply'. Below these is a filter creation area with two dropdown menus: 'Select Field' and 'Select O...'. A 'Save' button and a close 'X' button are also present. Below the filter area, there is a 'View by' dropdown set to 'Groups & Users Direct Pe', a 'Mark permissions unused for longer than' dropdown set to '6 months', and a grid of columns: 'Business Resource Full Path', 'Application', 'User Name', 'User Display Name', and 'Group Name'.

Note: For Permission Forensics, the data retrieved depend on the user scope of the user running the query. The data returned will only be within the applications and resources within each application to which the user running the query has access.

Note: A query can be deleted only by the user who created it.

Search for resources using a resource tree

Add resources for the filter by navigating down the resource tree and selecting the requested branch.

1. Open a new filter line.
2. Select **Resource** from the **Select Field** drop down list.
3. Open the **Select Resource** drop down menu to view the resource tree.

Save a query:

- Select **Save**. That will open a popup screen to enter the query name.
- Select **Save** or **Cancel** to continue.

Retrieve a saved query:

Note: If you select a saved query, the contents of your current query will be overwritten.

1. Select **Saved Queries**.
2. Select a query from one of the saved query lists:
 - Recent – a list of your recently used queries. These queries are named and ordered by the timestamp.
 - Saved – a list of queries saved by the user.
 - Shared – a list of queries shared with the user.

Clicking on a query loads the filters and displayed columns for the query. A query object cannot be edited, and changes made after loading a query do not impact the loaded query object. However, these changes can be saved in a new query.

Share a forensics query:

Sharing a query makes it available in the query list of other users in this forensics screen.

1. Create a query as described above.
2. Select **Save**.

3. Type in a name for the query.
4. Type in the name or part of a name of the user to share the query with.
5. Select the user from the dropdown list.
6. Select **Save** to save the query to your list and the assigned user's query list.
7. The query will be stored in the other user's list under **Shared**.

Generating Reports

Generate a report from the last run query:

1. Run a query as described above or by selecting a saved query from the query list.
2. Select **Global Options > Generate Report**.
3. The report will be available in My Reports.

Schedule and save a report template:

1. Run a query as described above or by selecting a saved query from the query list.
2. Select **Global Options > Generate Report**.
3. Name the schedule and fill in the scheduling parameters.